


# SLG-S-4.8

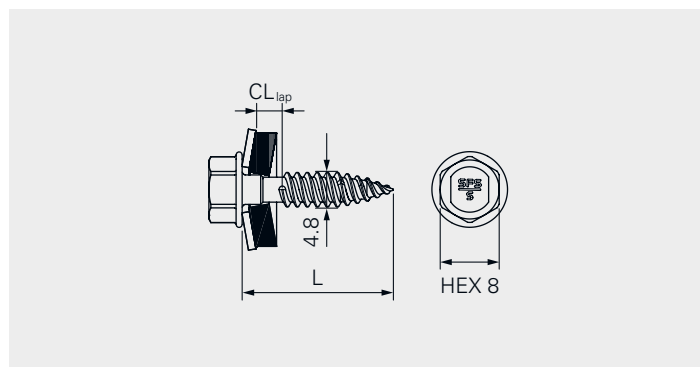

## Application

Fastening of overlaps of profile sheets  
Fastening of overlaps of sandwich panels  
Fastening of flashings onto sandwich panels  
Fastening of flashings onto profile sheets

| Component 1 (t <sub>I</sub> ) |          | Component 2 (t <sub>II</sub> ) |          | $\Sigma_{\max} t_I + t_{II}$ |
|-------------------------------|----------|--------------------------------|----------|------------------------------|
| Steel                         | 0.40–1.0 | Steel                          | 0.40–1.0 | 2.0                          |

## Fastener material

Austenitic stainless steel A2, case hardened speed point  
Sealing washer: Austenitic stainless steel A2, EPDM-seal

## Approvals




## Features and Benefits

- Self drilling fastener suitable for fastening of overlaps and flashings
- Fast and chip-free installation thanks to the FastTip
- No scratches on painted metal surfaces thanks to the sharp FastTip
- No torque control required given by free-spin zone
- Secured against unwinding given by cut-off thread-end and free-spin zone
- Cost saving installation due to post-cleaning of chips no longer necessary
- High quality EPDM sealing washer for long-term weather sealing
- High tension and shear resistance achieved by optimized fastener geometry


## Documentation

Approval document (ETA) | Declaration of performance (DoP)

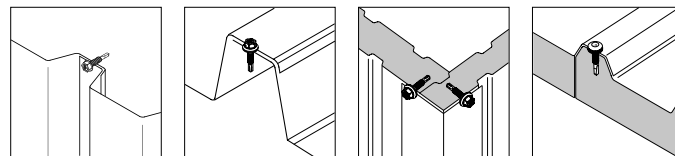

## Fastener in A2 onto steel

| Product code     | PU  | L  | CL <sub>lap</sub> | S14     | S16     | S19     |
|------------------|-----|----|-------------------|---------|---------|---------|
| SLG-S-S14-4,8x20 | 250 | 20 | 0.80-2.0          | 1351313 | 1378614 | 1378615 |



## Accessories/Ancillaries

| Product code | PU | Drive | Head drive |         |
|--------------|----|-------|------------|---------|
| E308-¼"-50   | 1  | ¼"    | HEX8       | 1646160 |